

1.25mm WTB (JFA) Series Connector:




SPECIFICATIONS


Pitch:	1.25 mm
Useable Wire Range:	AWG 32# ~ 26#
Current Rating:	1A, AC, DC
Voltage Rating:	100V, AC, DC
Operating Temperature:	-25 °C ~ +85 °C
Relative Humidity:	93%, +40 °C
Dielectric Withstanding:	500V AC/minute
Contact Resistance:	≤ 20 mΩ/Contact
Insulator Resistance:	≥ 500 MΩ at 100V
Material:	
Housing:	Nylon66/ Nylon6T, UL94V-0
Terminal:	Phosphor Bronze

ROHS Compliance


JFA-T




JFA-XY

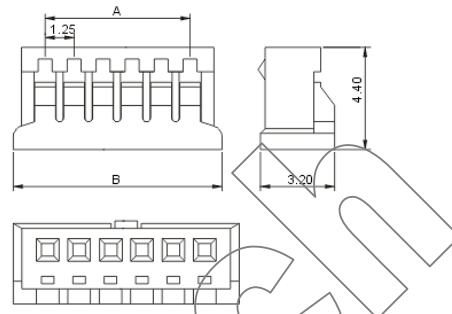

JFA-XA



JFA-XAW



Circuit	Part No.			Dimensions (mm)	
				A	B
2	JFA-2Y	JFA-2A	JFA-2AW	1.25	4.00
3	JFA-3Y	JFA-3A	JFA-3AW	2.50	5.25
4	JFA-4Y	JFA-4A	JFA-4AW	3.75	6.50
5	JFA-5Y	JFA-5A	JFA-5AW	5.00	7.75
6	JFA-6Y	JFA-6A	JFA-6AW	6.25	9.00
7	JFA-7Y	JFA-7A	JFA-7AW	7.50	10.25
8	JFA-8Y	JFA-8A	JFA-8AW	8.75	11.50
9	JFA-9Y	JFA-9A	JFA-9AW	10.00	12.75
10	JFA-10Y	JFA-10A	JFA-10AW	11.25	14.00
11	JFA-11Y	JFA-11A	JFA-11AW	12.50	15.25
12	JFA-12Y	JFA-12A	JFA-12AW	13.75	16.50
13	JFA-13Y	JFA-13A	JFA-13AW	15.00	17.75
14	JFA-14Y	JFA-14A	JFA-14AW	16.25	19.00
15	JFA-15Y	JFA-15A	JFA-15AW	17.50	20.25
16	JFA-16Y	JFA-16A	JFA-16AW	18.75	21.50