

2.54mm WTB (TJC8) Series Connector:




SPECIFICATIONS

Pitch: 2.54 mm
 Useable Wire Range: AWG 28# ~ 22#
 Current Rating: 3A, AC, DC
 Voltage Rating: 250V, AC, DC
 Operating Temperature: -25°C ~ +85°C
 Relative Humidity: 93%, +40°C
 Dielectric Withstanding: 1000V AC/minute
 Contact Resistance: ≤ 20 mΩ/Contact
 Insulator Resistance: ≥ 1000 MΩ at 100V


Material:
 Base: Nylon66/ Nylon6T, UL94V-0
 Contact Pin: Brass
 Housing: Nylon66, UL94V-0
 Terminal: Phosphor Bronze

ROHS Compliance


TJC8-T

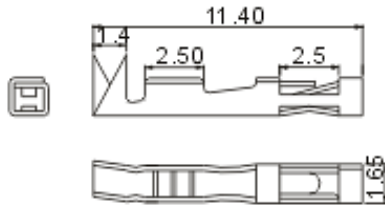


TJC8-XAS

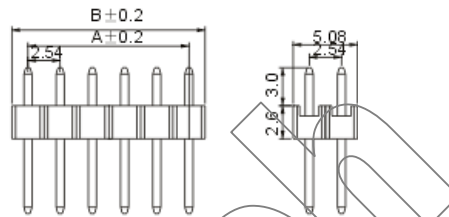


TJC8-XY

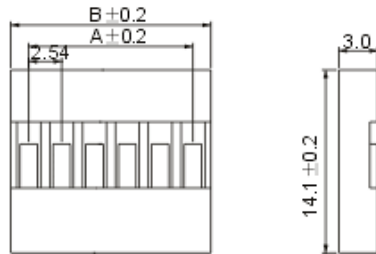


TJC8-XAW

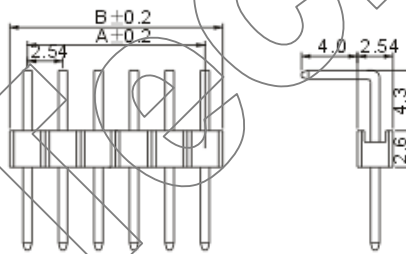

TJC8-XYs

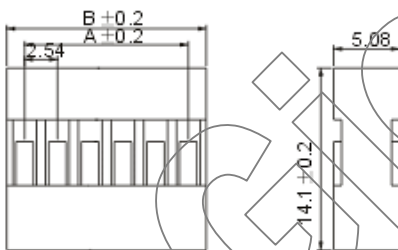

TJC8-XAWS

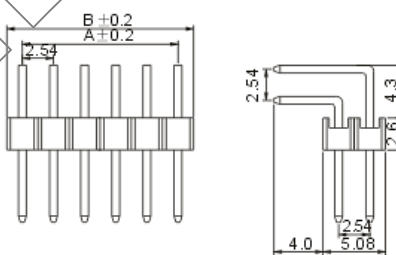

TJC8-XA

