

**2.9 x 3.9mm Tact Switch (SMT Type)**



TSB-01/02S-XXXH


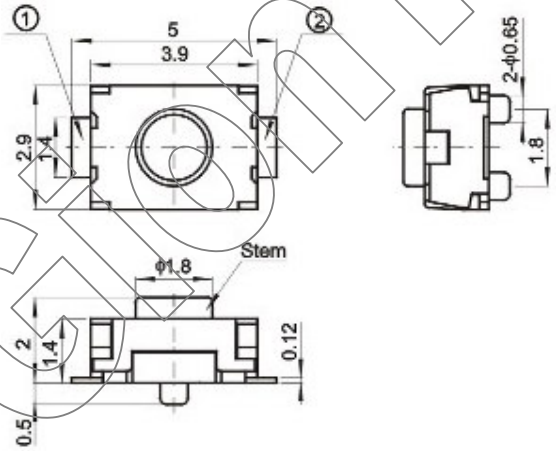

TS - Tact Switch  
 B - B Series  
 01 / 02 – Type  
 S - SMT Type  
 XXX - Action Force (gram)  
 H - With Post (Optional)


**SPECIFICATIONS**

Mechanical Life:	100,000 cycles
Operating Force:	180g±50g, 250g±50g
Travel:	0.2±0.1mm
Rating:	50mA 12V DC
Dielectric withstanding:	250V AC/minute
Insulator resistance:	≥ 100 MΩ at 100V
Contact resistance:	≤ 100 mΩ/Contact
Operating temperature:	-30°C ~ +85°C
Storage temperature:	-40°C ~ +85°C

**Material**

Base:	LCP, UL94V-0
Contact material:	Phosphor Bronze
Contact Spring Plating:	Stainless Steel/Silver Plating

Physical Picture	Outline Drawing	Circuit
 <p>TSB-01S-XXXH</p>		

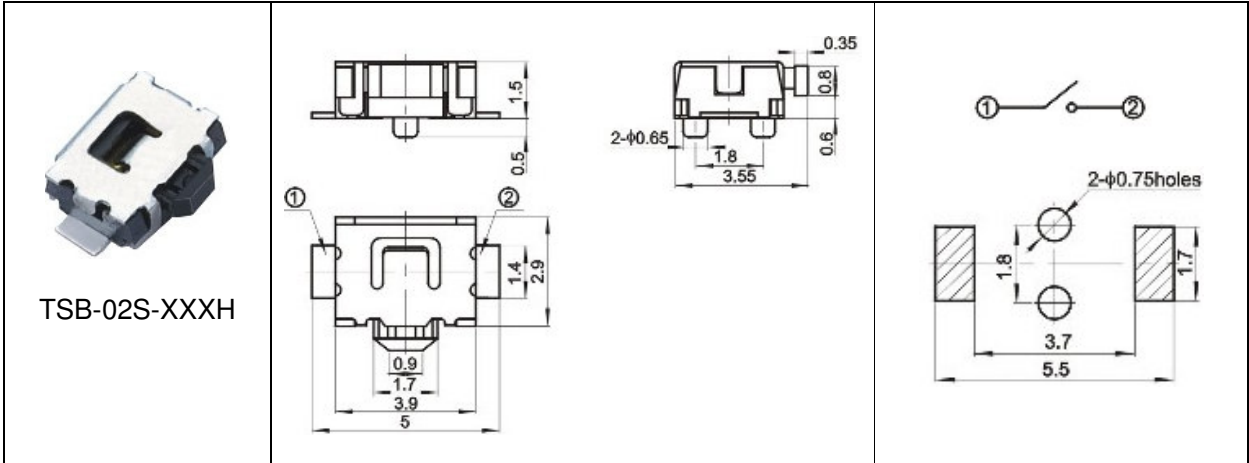

GionTech