

**0.4mm BTB (BB0.4E-2xXAF) Connector:**




**SPECIFICATIONS**

|                          |                      |
|--------------------------|----------------------|
| Pitch:                   | 0.4 mm               |
| Number of contacts:      | 24 pins              |
| Current Rating:          | 0.5A, AC, DC         |
| Voltage Rating:          | 100V, AC, DC         |
| Operating Temperature:   | -40°C ~+105°C        |
| Relative Humidity:       | 93%, +40°C           |
| Dielectric Withstanding: | 250V AC/minute       |
| Contact Resistance:      | ≤ 30 mΩ/Contact      |
| Insulator Resistance:    | ≥ 500 MΩ at 100V     |
| Material:                |                      |
| Base:                    | Nylon6T/LCP, UL94V-0 |
| Contact Pin:             | Phosphor Bronze      |

**ROHS Compliance**

**BB0.4E-2xXAF**

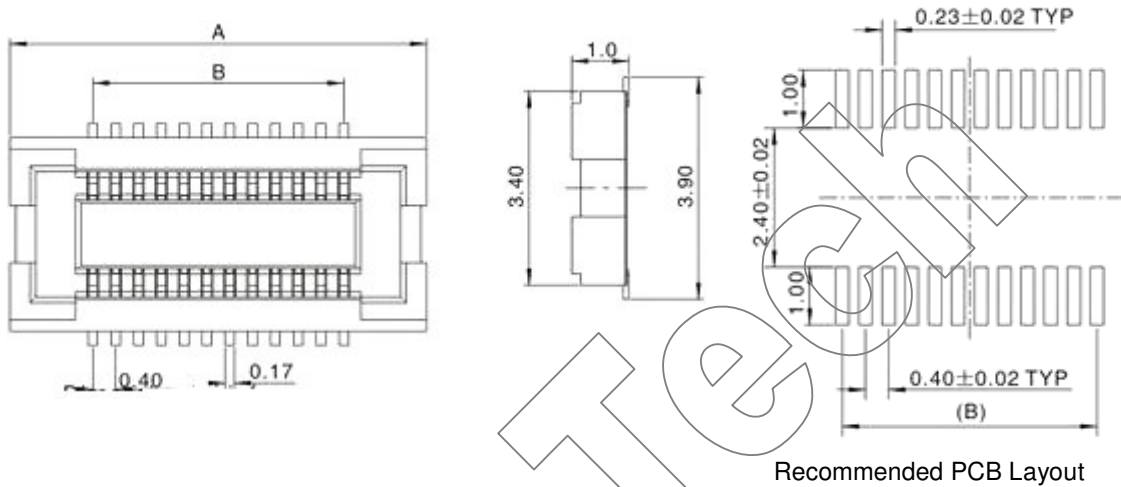

| Part No.      | Dimensions (mm) |      |
|---------------|-----------------|------|
|               | A               | B    |
| BB0.4E-2x12AF | 7.30            | 4.40 |