2.0mm Dual Row Box Header, R/A, TH Type with Latch:

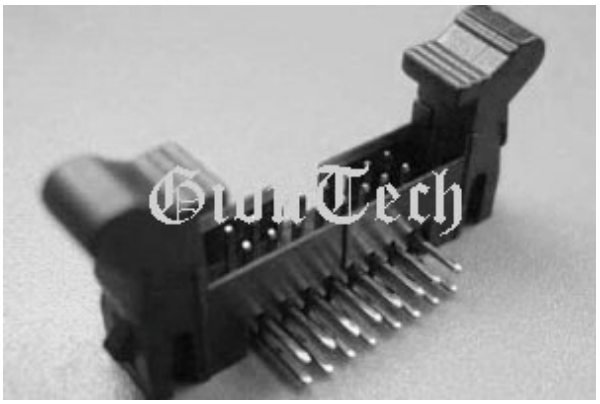

SPECIFICATIONS

Pitch:	2.0 mm
Number of contacts:	06 to 64 pins
Current Rating:	3.5A
Operating Temperature:	-55℃ ~+105℃
Relative Humidity:	93%, +40℃
Dielectric Withstanding:	550V AC/minute
Contact Resistance:	≤ 20 mΩ/Contact
Insulator Resistance:	≥ 1000 MΩ at 100V
Max. Process Temp:	230℃, 30-60s max.
	260℃, 10s max.
Material:	
Base:	PBT/Nylon6T, UL94V-0
Contact Pin:	Copper Alloy
Contact Plating:	Au or Sn Over 50u" Ni

ROHS Compliance

BH2.0-2xXAWL (H=8.1)

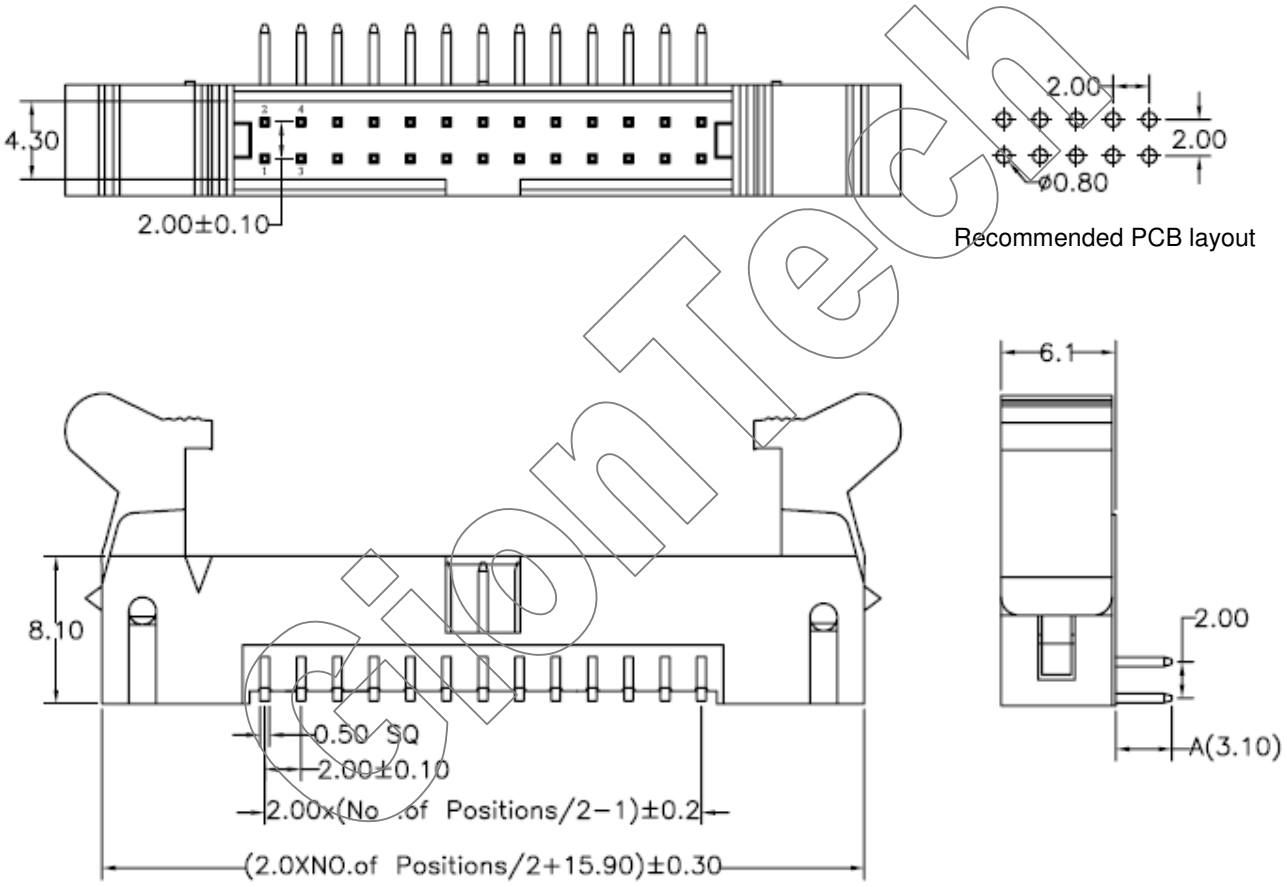

GionTech

Copyright © 1992, 2002, 2008 GionTech Group
info@giontech.com