


BH2032F Battery Holder:


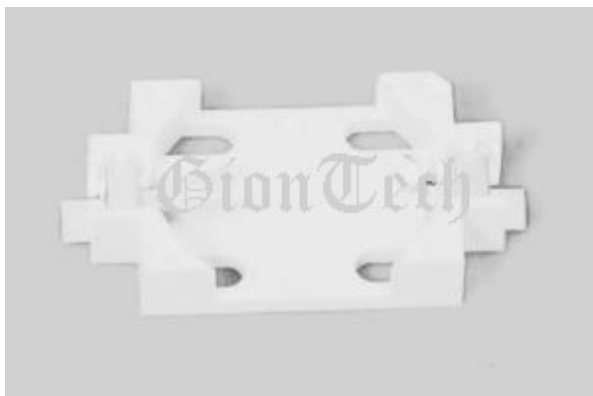


SPECIFICATIONS


Current Rating:	3A, AC, DC
Voltage Rating:	500V, AC, DC
Operating Temperature:	-55°C ~+105°C
Relative Humidity:	93%, +40°C
Dielectric Withstanding:	500V AC/minute
Contact Resistance:	≤ 30 mΩ/Contact
Insulator Resistance:	≥ 1000 MΩ at 100V
Material:	
Base:	Nylon6T/LCP, UL94V-0
Contact Pin:	Phosphor Bronze
Contact Plating:	Sn Over 50u" Ni

ROHS Compliance

BH2032F

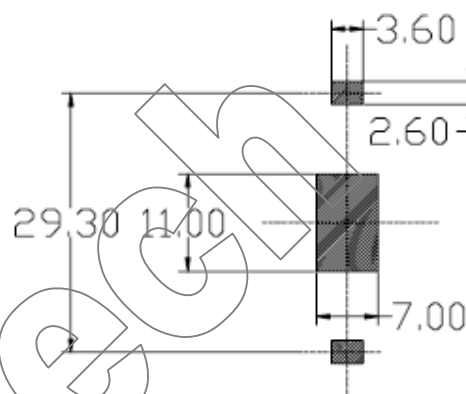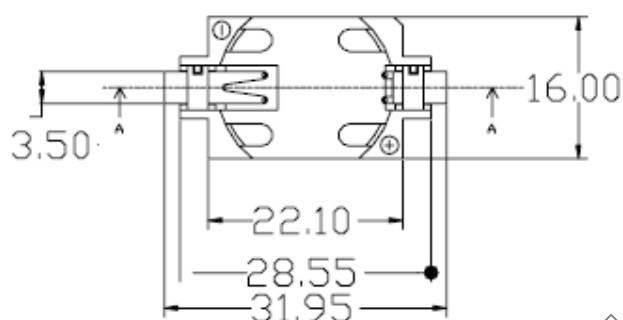

Recommended PCB layout

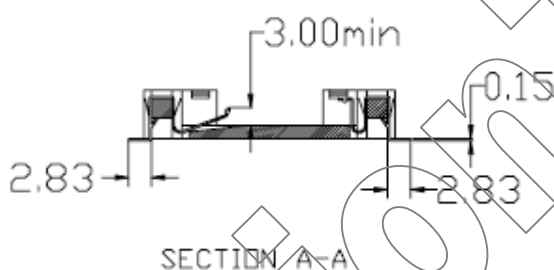

SECTION A-A