

CR123A Battery Holder:




SPECIFICATIONS

Current Rating:	3A, AC, DC
Voltage Rating:	500V, AC, DC
Operating Temperature:	-40 °C ~+85 °C
Relative Humidity:	93%, +40 °C
Dielectric Withstanding:	1000V AC/minute
Contact Resistance:	≤ 20 mΩ/Contact
Insulator Resistance:	≥ 1000 MΩ at 100V
Material:	
Base:	ABS/Nylon66, UL94V-0
Contact Pin:	Phosphor Bronze

ROHS Compliance

CR123A

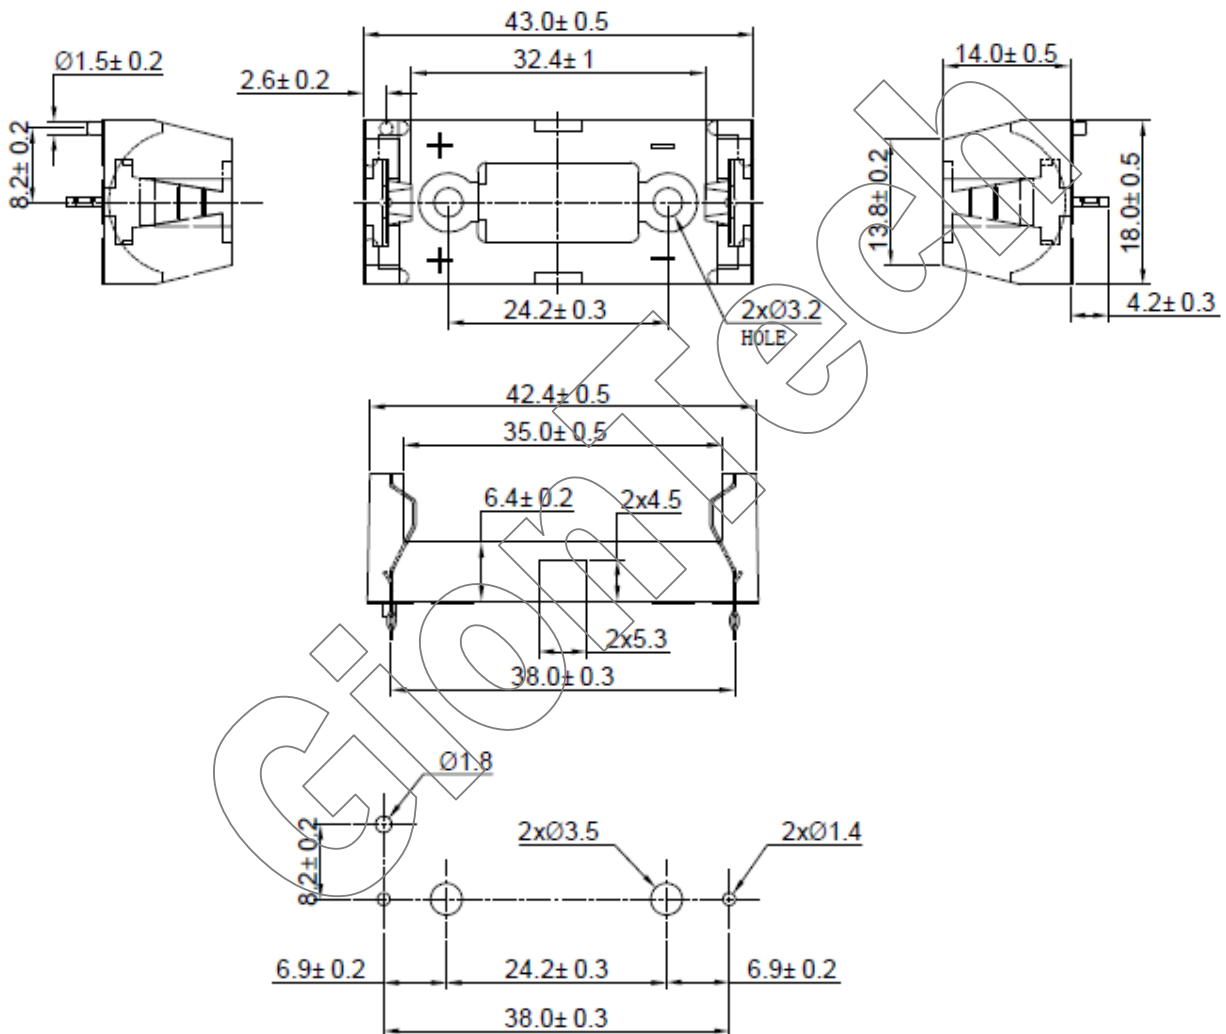

Recommended PCB layout