


Dual Row, Male, R/A, DIP Type D-SUB:

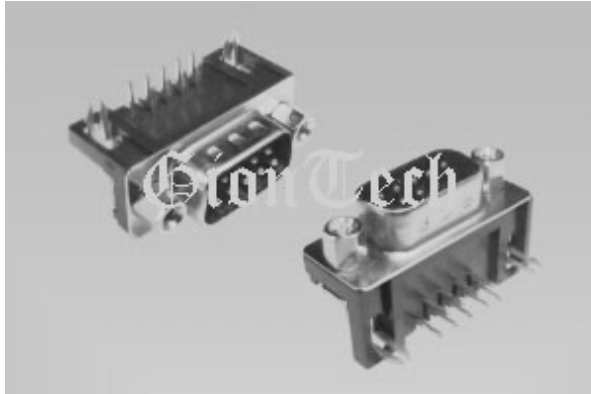


SPECIFICATIONS

Power Rating:	5.0A/125V AC, DC
Operating Temperature:	-55°C ~+105°C
Relative Humidity:	93%, +40°C
Dielectric Withstanding:	1000V AC/minute
Contact Resistance:	≤ 10 mΩ/Contact
Insulator Resistance:	≥ 1000 MΩ at 500V
Material:	
Insulator:	PBT + 30% GF, UL94V-0
Contact Pin:	Copper Alloy
Shell:	Steel, Ni/Tin Plated
Contact Plating:	Selective Au plated Over 50u" Ni on contact pin

ROHS Compliance

**DR-9PM-XA, DR-15PM-XA, DR-25PM-XA, DR-37PM-XA
DR-9PM-XAL, DR-15PM-XAL, DR-25PM-XAL, DR-37PM-XAL**

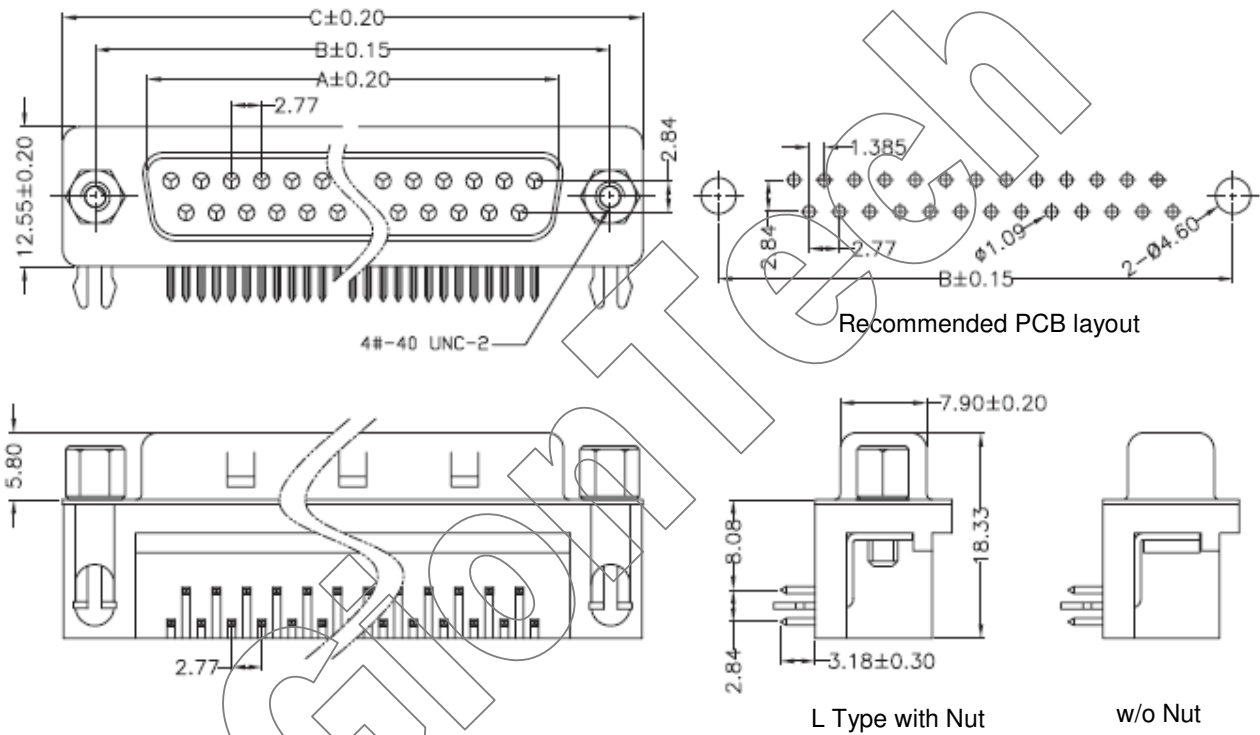

Circuit	Part No. (w/o Locking)	Part No. (with Locking)	Dimensions (mm)					Colour Code (X)	Colour
			A	B	C	D	E		
9	DR-9PM-1A	DR-9PM-1AL	17.77	24.99	30.90	19.20	15.65	1	Black
15	DR-15PM-1A	DR-15PM-1AL	25.25	33.32	39.14	27.65	24.60	3	Green
25	DR-25PM-1A	DR-25PM-1AL	38.38	47.04	53.04	41.10	38.00	4	Blue
37	DR-37PM-1A	DR-37PM-1AL	55.42	63.50	69.32	57.44	54.50	5	Yellow