


HDMI Plug, A Type (Solder For Cable Assembly):

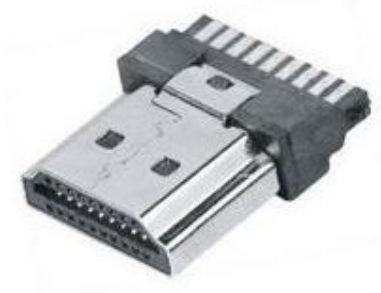

SPECIFICATIONS

| | |
|--------------------------|-----------------------|
| Current Rating: | 0.3A, AC, DC |
| Voltage Rating: | 30V, AC, DC |
| Operating Temperature: | -25°C ~+85°C |
| Relative Humidity: | 93%, +40°C |
| Dielectric Withstanding: | 500V AC/minute |
| Contact Resistance: | ≤ 20 mΩ/Contact |
| Insulator Resistance: | ≥ 500 MΩ at 100V |
| Material: | |
| Shell: | Steel, Ni/Tin Plated |
| Insulator: | PBT/ Nylon66, UL94V-0 |
| Contact Pin: | Phosphor Bronze |

ROHS Compliance

HDAM-19AS1

