


**Triple Row, Male, R/A DIP Type D-SUB:**

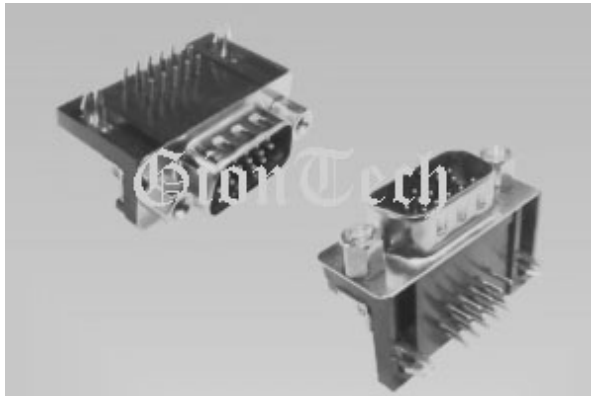


**SPECIFICATIONS**

Power Rating:	5.0A/125V AC, DC
Operating Temperature:	-55°C ~+105°C
Relative Humidity:	93%, +40°C
Dielectric Withstanding:	1000V AC/minute
Contact Resistance:	≤ 10 mΩ/Contact
Insulator Resistance:	≥ 1000 MΩ at 500V
Material:	
Insulator:	PBT + 30% GF, UL94V-0
Contact Pin:	Copper Alloy
Shell:	Steel, Ni/Tin Plated
Contact Plating:	Selective Au plated Over 50u" Ni on contact pin

**ROHS Compliance**

**HDR-15PM-XA, HDR-26PM-XA, HDR-44PM-XA, HDR-62PM-XA  
HDR-15PM-XAL, HDR-26PM-XAL, HDR-44PM-XAL, HDR-62PM-XAL**

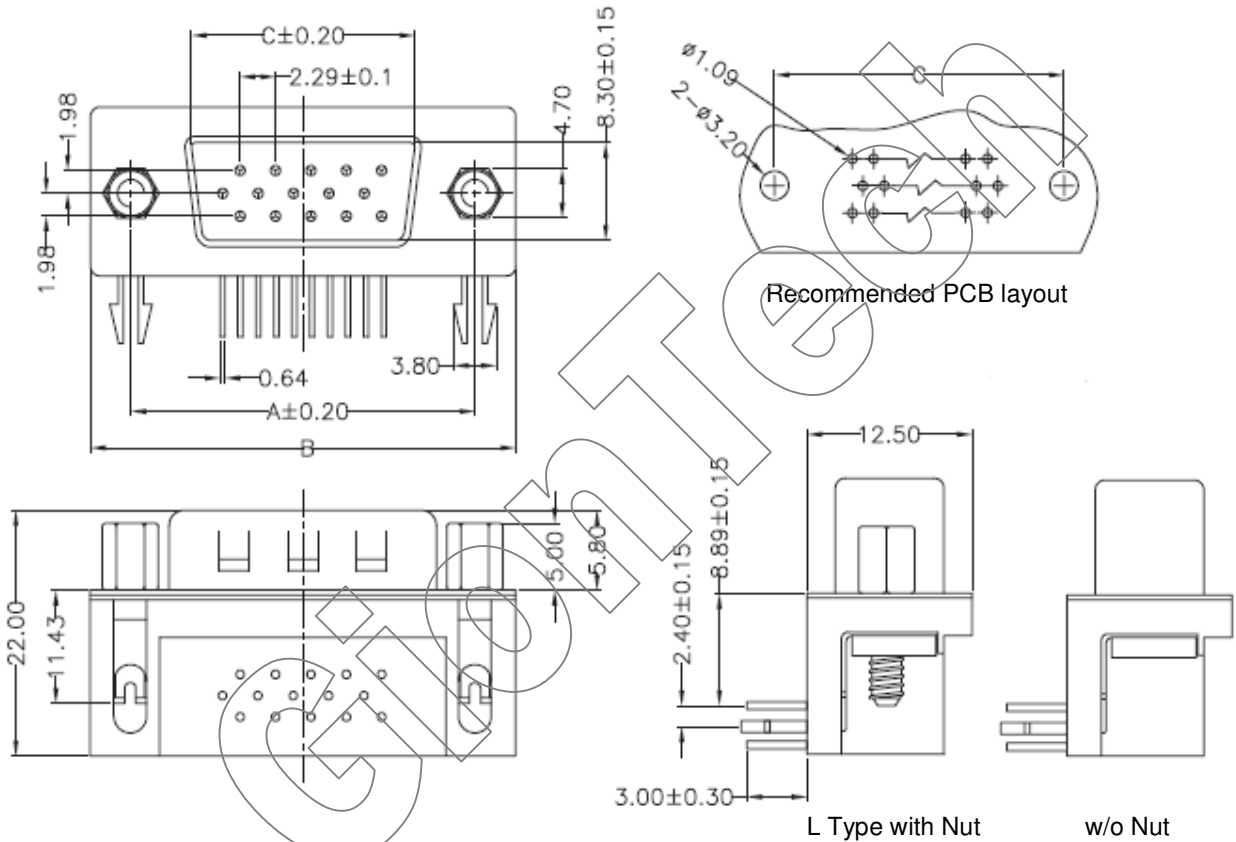

Circuit	Part No. (w/o Locking)	Part No. (with Locking)	Dimensions (mm)			Colour Code (X)	Colour
			A	B	C		
15	HDR-9PM-1A	HDR-9PM-1AL	24.99	30.86	16.92	1	Black
26	HDR-15PM-1A	HDR-15PM-1AL	33.32	39.14	25.25	2	White
44	HDR-25PM-1A	HDR-25PM-1AL	47.04	53.66	38.96	3	Green
62	HDR-37PM-1A	HDR-37PM-1AL	63.50	69.80	55.42	4	Blue
						5	Yellow