


**1.0mm Dual Row Pin Header, Vertical, SMT Type:**

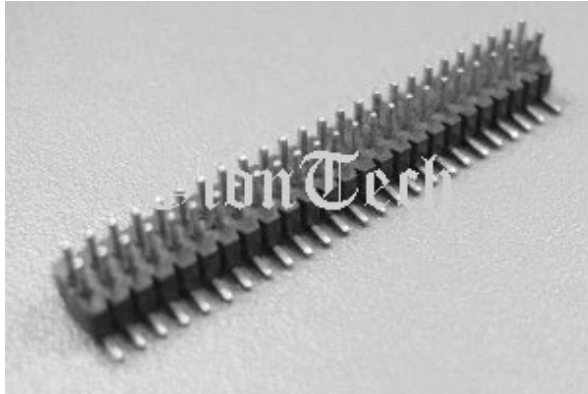

**SPECIFICATIONS**

Pitch:	1.0 mm
Number of contacts:	2 to 100 pins
Current Rating:	2.0A
Operating Temperature:	-55°C ~+105°C
Relative Humidity:	93%, +40°C
Dielectric Withstanding:	300V AC/minute
Contact Resistance:	≤ 20 mΩ/Contact
Insulator Resistance:	≥ 1000 MΩ at 100V
Soldering Temperature:	230°C, 30-60s max. 260°C, 10s max.
Material:	
Base:	Nylon6T/LCP, UL94V-0
Contact Pin:	Copper Alloy
Contact Plating:	Au or Sn Over 50u" Ni

**ROHS Compliance**

**PH1.0-2xXAB (B/D/W2) (H=1.0/1.5) / PHD1.0-2xXAB (B/C/D/W2) (H=1.0/1.5)**

**PH1.0-2xXAB1 (B/D/W2) (H=1.0/1.5) / PHD1.0-2xXAB1 (B/C/D/W2) (H=1.0/1.5)**

