


**2.54mm Dual Row Pin Header, R/A, SMT Type:**

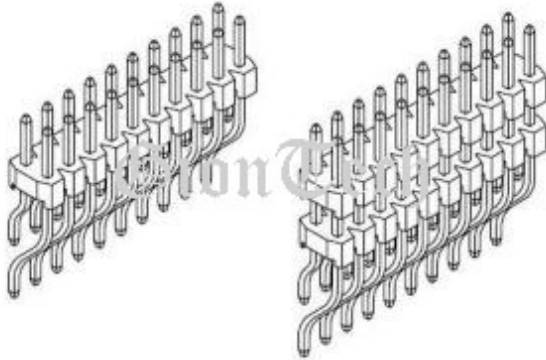

**SPECIFICATIONS**

Pitch:	2.54 mm
Number of contacts:	6 to 80 pins
Current Rating:	5.0A, AC, DC
Operating Temperature:	-55°C ~+105°C
Relative Humidity:	93%, +40°C
Dielectric Withstanding:	450V AC/minute
Contact Resistance:	≤ 20 mΩ/Contact
Insulator Resistance:	≥ 1000 MΩ at 100V
Soldering Temperature:	230°C, 30-60s max. 260°C, 10s max.
Material:	
Base:	Nylon6T/LCP, UL94V-0
Contact Pin:	Copper Alloy
Contact Plating:	Au or Sn Over 50u" Ni

**ROHS Compliance**

**PH2.54-2xXAWB (B/D/W2) (H=1.5/1.7/2.0/2.5)**

**PHD2.54-2xXAWB (B/C/D/W2) (H=1.5/1.7/2.0/2.5)**

